



FLIP-S

The Castell protective cap is used to prevent dust ingress into the Castell F (Figure) style lock portion. In addition, the cap can be fitted with a padlock to prevent lock operation during maintenance.

Usage

The Castell FLIP-S is padlockable protective cap is used to prevent dust ingress getting into the Castell F (Figure) style lock portion.



Technical Data

Temperature rating	Minimum: -40°C [-40°F] ice free for Q & F Type
	Maximum: 107°C [224,6°F] for Q Type/140°C [284°F] for F Type
Weight	0,1 kg
Material	Stainless steel/brass /nickel plated/chrome plated/nylon coated

No hazardous substances were used in the manufacture of this product. The product can be disposed of in standard waste.

EC-Declaration

We, the manufacturers, declare that the components, detailed herein and placed on the market, comply with all the essential health and safety requirements applying to them.



Empowered signatory:

Mr T.C. Whelan
Managing Director



Drawing

FLIP-S

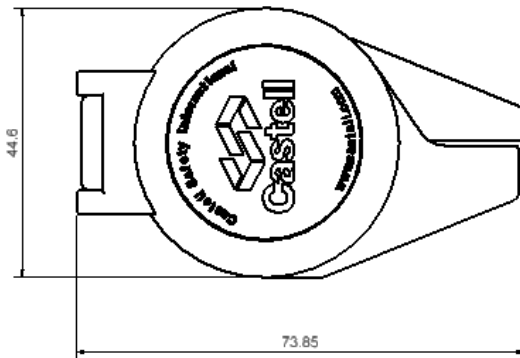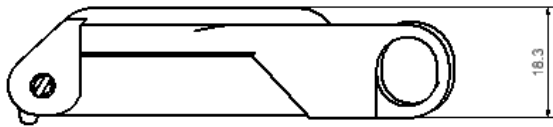

Order Information

Part Number **FLIP** - **S**

Contact Information

Castell Safety International Ltd.
The Castell Building
217 Kingsbury Road
London, England NW9 9PQ

t: +44 (0) 20 8200 1200
f: +44 (0) 20 8905 9378
e: uksales@castell.com

Castell Safety International Ltd.
Oskar-Jäger-Strasse 137
50825 Köln
Germany

t: +49 (0) 221 1694 794
f: +49 (0) 221 1694 795
e: vertrieb@castell.com

Castell Interlocks Inc.
Suite 800
150 N Michigan Avenue,
Chicago, Illinois 60601
USA

t: +1.312.360.1516
f: +1.312.268.5174
e: ussales@castell.com

Castell Safety China
Building 1, No. 123,
Lane 1165, Jindu Road,
Minhang District,
Shanghai 201108, China.

t: +86 21 61519023
f: +86 21 61519030
e: chinasales@castell.com

While every effort has been made to ensure the accuracy of the information provided, no liability can be taken for any errors or omission.
Castell Safety International Limited reserves the right to alter specifications and introduce improvements without prior notice.