


KL Dual Key Bolt Interlock

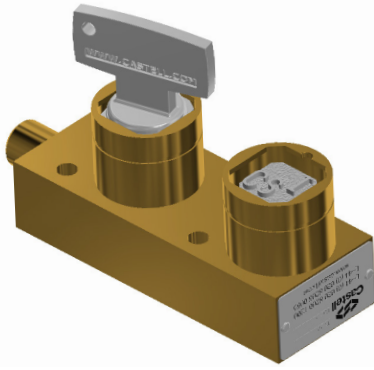


The KL Dual Key Bolt Interlock is a key operated mechanical bolt interlock suitable for the control of electrical switchgear. The interlock is used to control the rotation or movement of operating handles or toggles of electrical switchgear and is manufactured in brass or stainless steel. The KL Bolt Interlock is available in a double key or exchange key condition.

OPERATION

The Castell KL Bolt Interlock range is used on control of switchgear to inhibit movement of cams, toggles or levers.


KL Dual Key Bolt Interlock, exchange key condition

- 1** Key A (Primary) is free while key B (Secondary) is trapped, bolt is retracted

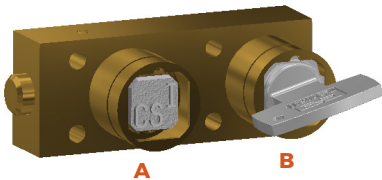


When switch is on, the bolt is retracted and key B is trapped in the lock.

- 2** Insert and turn key A to extend bolt and allow the release of Key B

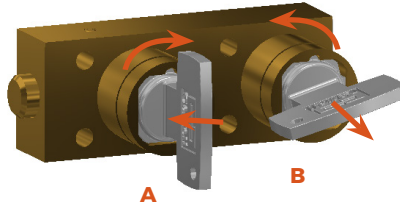

When switch is turned off, the bolt is extended to lock it in position. Key B can now be removed and Key A is trapped.


- 3** Key A is trapped, Key B is free and bolt extended

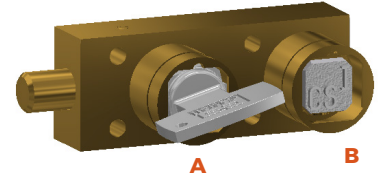

Key A stays trapped while bolt is extended. Key B is free. Switch remains locked in off position.


KL Dual Key Bolt Interlock, double key condition

- 1** Key A (Primary) and key B (Secondary) are trapped, bolt is retracted

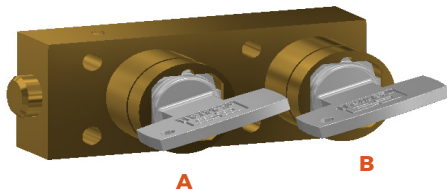


When switch is on, the bolt is retracted and keys A and B are trapped in the lock.

- 2** When switch turned to off position, keys A and B are turned extending the bolt

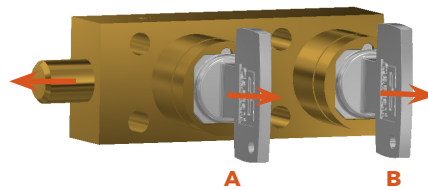

The bolt is extended to lock switch in off position. Both keys can now be released.

- 3** Keys A and B are free and bolt is extended

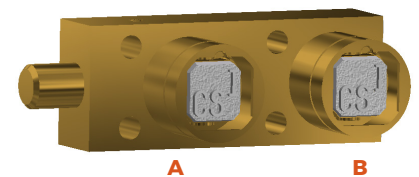

Switch remains locked in off position.

The length of the bolt can be varied to suit the application but travel of the bolt is always 19.05 mm.

USAGE

The KL Dual Key Bolt Interlock should be used as a part of a safety system to allow safe control of disconnect switches.





-  The KL Bolt Interlock is not designed for security purposes, such as access to a building.
-  The KL Bolt Interlock is not recommended to interlock gates or doors. Please refer to the AIE Access Interlock.

No hazardous substances were used in the manufacture of this product.

INSTALLATION

The housing of the KL Bolt Interlock should normally be mounted to a panel using suitable fasteners. Please refer to drawing on page 4 for more installation details.



If required, mounting kits are available from switchgear equipment suppliers.

-  The KL Bolt Interlock must be installed by a competent and qualified person who has read and understood these instructions. Please retain this document in your technical file.
-  Force required to shear lock bolt is 30KN for stainless steel and 19KN for brass interlocks.
-  You must use M6 anti-tamper stainless steel screws secured using threadlock set to a torque of 5 N/M.
-  The manufacturer should be consulted when use in a corrosive environment is planned.

MAINTENANCE

Periodic visual checks should be carried out by the site manager / safety officer.

Do not lubricate lock barrel with oil or grease, use CK dry powder graphite if necessary.

-  In case of defects being detected please contact your nearest Castell Support Department for further actions. Please see Contact section for contact details.
-  The interlock must be inspected every 6 months. Safety checks should include ensuring the keys and lock bolt can only be operated in the correct safety operating conditions (see page 1).

TECHNICAL DATA

Temperature rating	Minimum: -40°C [-40°F] ice free for Q & FS lock type
	Maximum: 107°C [224.6°F] for Q lock type/140°C [284°F] for FS lock type
Type of mounting	Surface mount using suitable fasteners (please refer to drawing on page 4 for more details)
Weight	1.4 kg
Material	Brass/Stainless steel
B10d	2,500,000
PL rating	PLd
Shock & vibration	In accordance with BS EN 50155


APPLICATION

KL Dual Key Bolt Interlock safety component is used as part of an integrated safety system. In this application the electrical supply to the machine is switched on and the access doors to the hazardous area are locked closed.

Keys A and B are trapped in the KL Bolt Interlock, preventing access to the machine area. To enter the area, the electrical supply must be turned off. Turning and releasing the keys in the KL Interlock will extend the bolt locking the disconnecter in the off position.

The released keys can now be taken to the machine area to gain access via the AI Access Interlocks.

The disconnecter cannot be switched on until both access doors are locked closed and both keys returned to the KL Interlock.

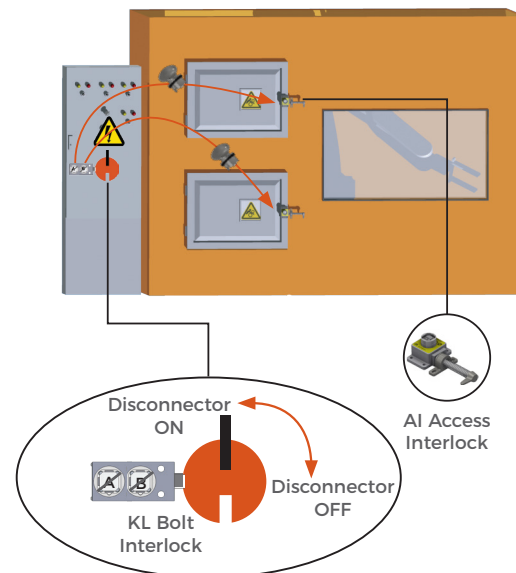

EC-DECLARATION

We, the manufacturers, declare that the components detailed herein and placed on the market comply with all the essential health and safety requirements applying to them.

ISO 13849-1:2015 Safety of Machinery

2006/42/EC Machinery Directive

Empowered signatory:

Kirstie Van Oerle
Business Unit Director




KL Dual Key Bolt Interlock

DRAWING

Dimensions: in mm

Note: For safe mounting, use security screws

KL, form 4

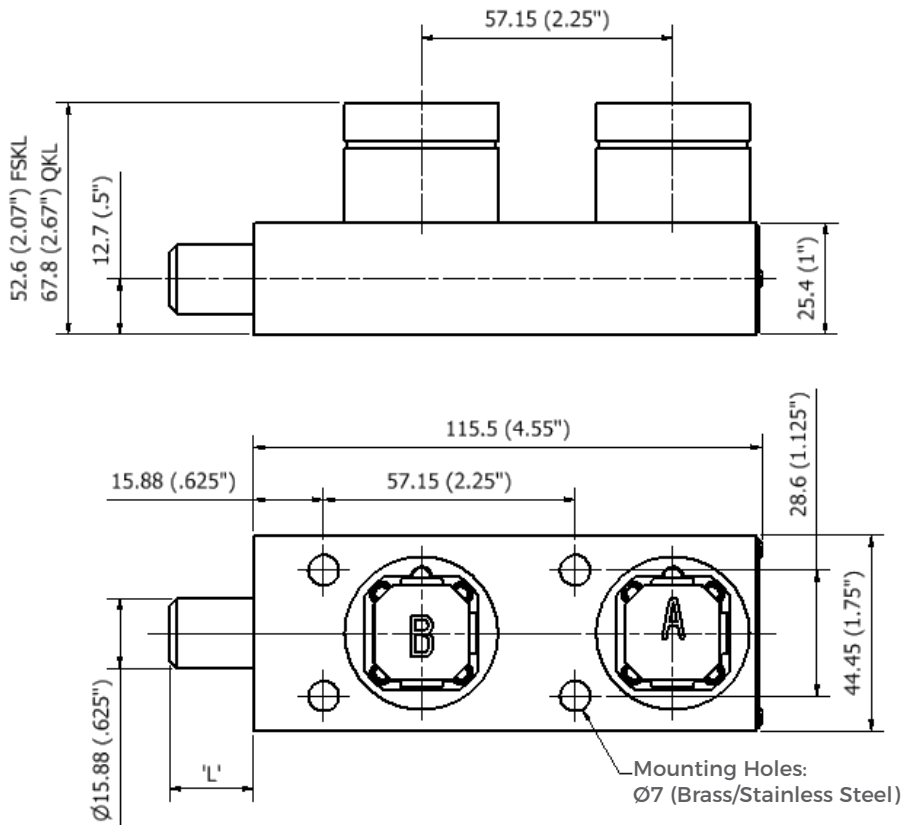


L Dimension Retracted bolt length (in mm)	Extended bolt length (in mm)
0	19.05
6.40	25.40
12.70	31.75
19.05	38.10
25.40	44.45

ORDER INFORMATION


	Component type	1	2	3	4	5	6
Part number	KL						
Example	KL	FS	B	1S	6.4	1	D
		7		Primary key symbol		8	
							Secondary key symbol

1	Lock portion type	FS ⁽¹⁾ / Q ⁽¹⁾
2	Material	B = Brass / S = Stainless steel
3	Number of secondary lock portions	1S = 1 secondary key (2 locks in total) 2S = 2 secondary keys (3 locks in total) 3S = 3 secondary keys (4 locks in total)
4	L dimension (bolt length when retracted) in mm	0 / 6.4 / 12.7 / 19.1 / 25.4
5	Form	1 / 2 / 3 / 4 ⁽²⁾
6	Key condition	D = double key condition / E = exchange key condition (see operation details, page 1)
7	Lock portion symbol: Primary key (closest to bolt)	FS ⁽¹⁾ up to 3 characters / Q ⁽¹⁾ up to 6 characters
8	Lock portion symbol: Secondary key (furthest from bolt)	FS ⁽¹⁾ up to 3 characters / Q ⁽¹⁾ up to 6 characters





(1) **FS - Lock type**
Up to 3 characters



Q - Lock type
Up to 6 characters




(2) **Form**

Special construction available upon enquiry

ACCESSORIES

	Product	Part number
	Flip Cap	FLIP-S

CONTACT INFORMATION

Castell Safety
The Castell Building
217 Kingsbury Road
London, NW9 9PQ
UK

t: +44 (0)20 8200 1200
f: +44 (0)20 8205 0055
e: sales@castell.com

Castell Safety
Tower 185
60185 Frankfurt am Main
Germany

t: +49 (0)69 50 50 47 310
f: +49 (0)69 50 50 47 450
e: vertrieb@castell.com

Kirk Key Interlock
9048 Meridian Circle NW
North Canton, OH 47720
USA

t: +1 800 438 2442
f: +1 330 497 4400
e: sales@kirkkey.com

SPS China
2F, Building 63
No 421 Hongcao Road, Xuhui District
Shanghai PRC, 200233
China

t: +86 (0)21 6040 7398
f: +86 (0)21 5453 0630
e: chinasales@castell.com